

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: Camden

SPECIFICATIONS

HOUSING:

Solid brass with weathered brass finish. Threaded with O-ring. Watertight and bug-tight.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LENS:

Clear flat tempered lens.

LAMP TYPE:

12V MR16. LED recommended. 35W maximum.

MOUNTING:

Swivel mount with brass Y-bracket included. Stem threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories shown on back page.

WIRING:

Prewired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The Camden solid brass down light comes with a Y-bracket for its infinitely adjustable swivel mount, and other mounting options are available. Clear tempered lens ensures water and bug resistant operation. Can be aimed as an uplight. Can be offset from its surface mount with accessory risers (2-6 inches or more).

DIMENSIONS:

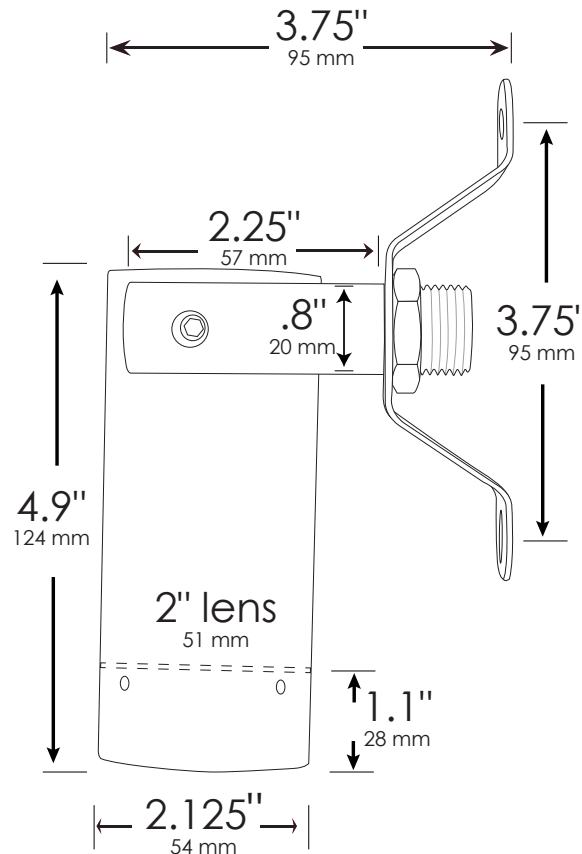

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V MR16 UL-listed (E353116) lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 100°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K=ultra-warm; 3000K=warm white; 4000K=neutral white; and 5000K=cool white. Decorative and wildlife-approved color light options include blue, green, and sea-turtle-safe amber and red.



| FIXTURE | | LAMP | | MOUNTING | | RISER | |
|---------|---------|------------------------------|-------------------------------|-----------|--|-----------|-----------------------|
| Camden | WATTAGE | BEAM SPREAD | COLOR TEMP. | MY | Y-bracket surface mount (incl.) 490045 | R2 | 2" brass riser 490038 |
| | 2W | 25° / 40° / 60° / 100° | 2700K / 3000K | MG | Brass gutter mount 490047 | R3 | 3" brass riser 490039 |
| | 4W | 25° / 40° / 60° / 100° | 2700K / 3000K | MR | Round 3-hole surface mount 490048 | R6 | 6" brass riser 490031 |
| | 5W | 15° / 25° / 40° / 60° / 100° | 2700K / 3000K | | | | |
| | | 25° | Amber / Blue / Green / Red | | | | |
| | 6W | 25° / 40° / 60° | 2700K / 3000K | | | | |
| | 7W | 25° / 40° | 2700K / 3000K / 4000K / 5000K | | | | |
| 60° | | 2700K / 3000K | | | | | |