

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: Aurora

SPECIFICATIONS

VOLTAGE: 12 V

SOCKET: Gimbale MR16 (GU5.3 bi-pin)

BODY: Paintable white aluminum

WIRE LEADS: 12-inch leads with quick disconnect


MAXIMUM WATTAGE: 35 W

WARRANTY: Five years



The Aurora recessed fixture is easy to install in a soffit. Match it with an MR16 LED lamp to achieve the desired effect. Gimbal allows you to aim the beam.

DIMENSIONS:

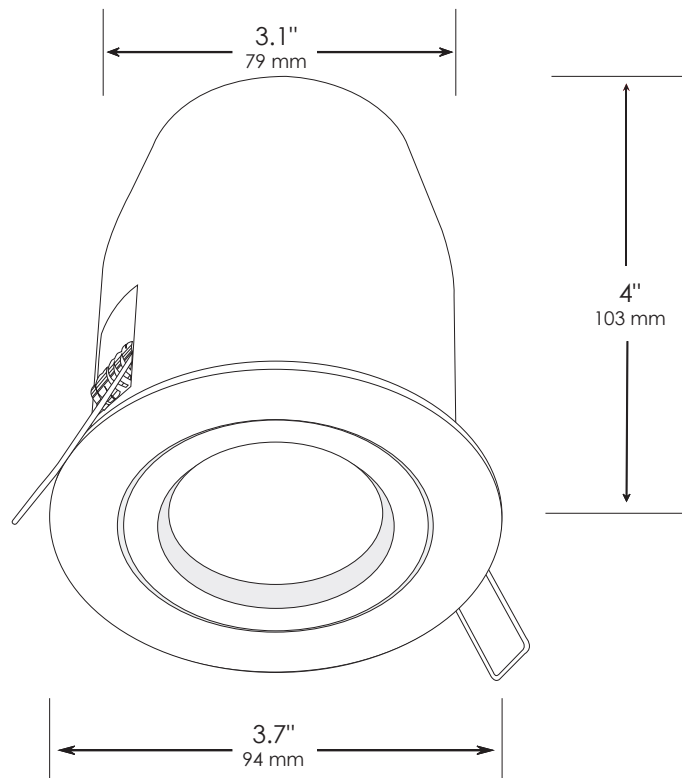

LED LAMP SPECIFICATIONS

LAMP TYPE:

MR16 UL-listed (E353116) 12V lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 100°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K=ultra-warm; 3000K=warm white; 4000K=neutral white; and 5000K=cool white. Decorative color light options include amber, blue, green, and red.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with lamp options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490061-5W-40-2700K

FIXTURE	LAMP		
	WATTAGE	BEAM SPREAD	COLOR TEMP.
Aurora	2W	25° / 40° / 60° / 100°	2700K / 3000K
		15° / 25° / 40° / 60° / 100°	2700K / 3000K
	4W	15° / 25° / 40° / 60° / 100°	2700K / 3000K
		15° / 25° / 40° / 60° / 100°	2700K / 3000K
	5W	25°	Amber / Blue / Green / Red
		25° / 40° / 60°	2700K / 3000K
	6W	25° / 40°	2700K / 3000K / 4000K / 5000K
		25° / 40° / 60°	2700K / 3000K
	7W	25° / 40°	2700K / 3000K
		60°	2700K / 3000K

